
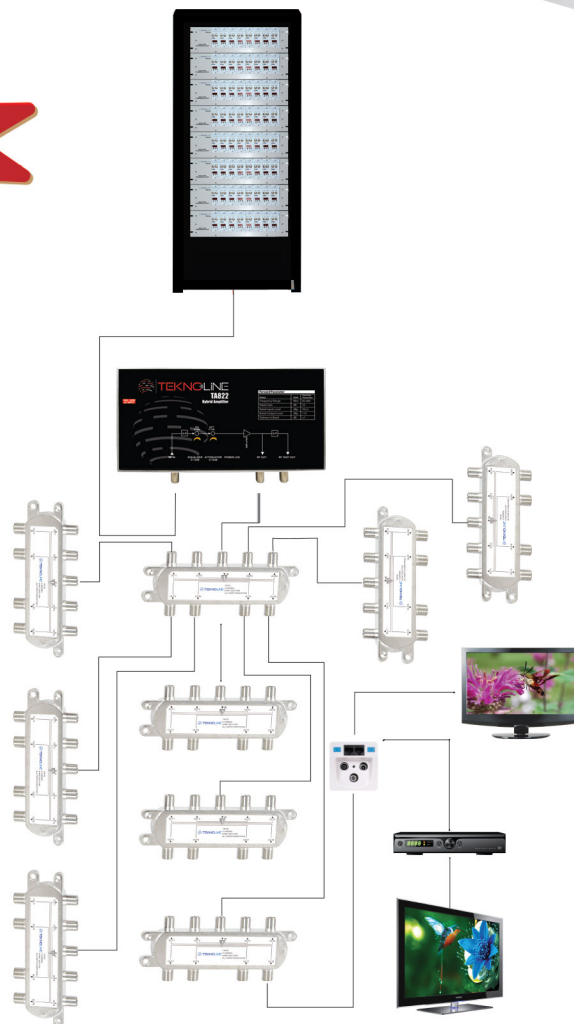


TA 822

Hybrid Amplifier

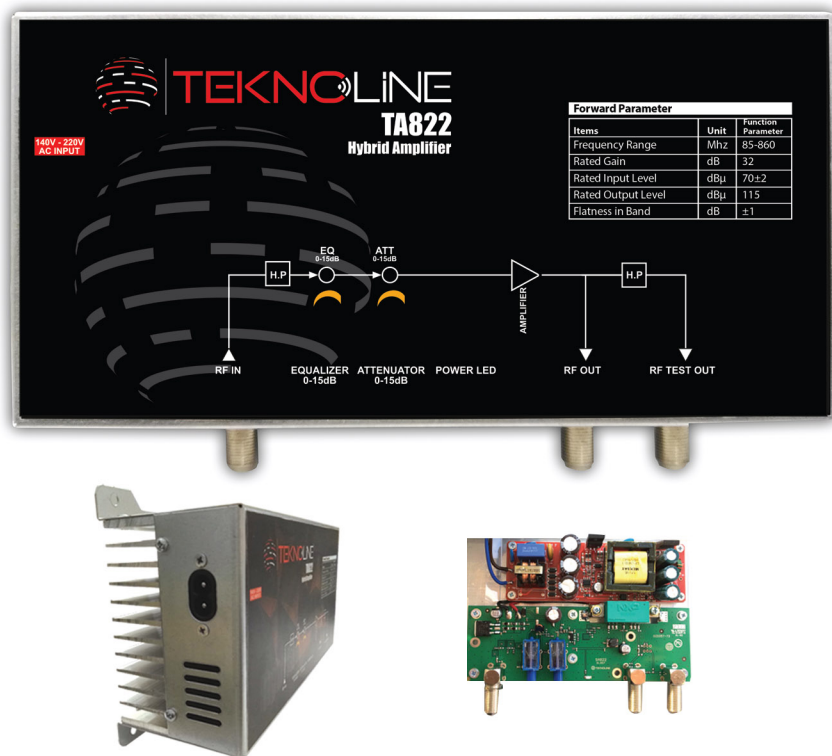

This product used at cabinet headend output to amplifier RF signal. With high powered IF amplifier and hybrid amplifier inside of it. It can amplify terrestrial and satellite broadcast. It is stylish and it can spread and heat across case.

TECHNICAL SPECIFICATIONS

	THA-32ZI
Frequency range SAT	950-2150 Mhz
Frequency range TERR	47-870 Mhz
Attenuator	20 dB
Gain TERR	+30dB ±2
Equalizer Range	0...15dB
Isolation SAT-SAT	80dB ±10
Isolation SAT-TERR	70dB ±10
Input SAT + TERR	>43 dB
Output SAT + TERR	>50 dB
Operating voltage	1+1
Temperature	1
Dimensions	220V - 50 HZ
Weight	-20 +50°C